


**Grease traps, grease separators SG series (rectangular shape)**  
**Prices for exports**



Schematic diagram of the grease trap SG series "Optima"

1. Cast housing
2. Cover
3. Inlet
4. Outlet
5. Sealing gum
6. Metal latch
7. Connection for ventilation
8. Zone fat collection
9. Zone collection of sludge (sludge)
10. Knee to the inlet pipe

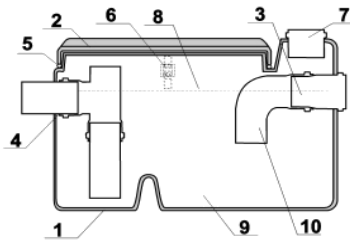

Price list is valid from 01.02.2018

Model	Performance m3/hour (L/s)	Displacement (L)	Rated peak discharge (L)	Dimensions (mm)			Diameter pipes (mm)	Entry height (mm)	Output height (mm)	Weight (kg)	Price in euro, without taxes	
				length	width	height						
<b>GREASE TRAPS UNDER THE SINK</b>												
SG 0,5-0,04 "Optima"	0,5/ 0.145	45	25	450	340	350	50	250	225	4,0	<b>46,50</b>	
SG 0,5-0,04 "Optima" F		45	25	450	340	350	50	250	225	4,5	<b>53,00</b>	
SG 0,5-0,045		45	25	450	350	345	50	255	235	4,5	<b>51,50</b>	
SG 0,5-0,045 F		45	25	450	350	345	50	255	235	5,0	<b>57,75</b>	
SG 0,5-0,06 "Optima-60"		60	35	480	420	320	50	230	225	4,0	<b>56,25</b>	
SG 0,5-0,06 "Optima-60" F		60	35	480	420	320	50	230	225	4,5	<b>62,25</b>	
SG 0,5-0,06		60	35	440	390	410	50	320	300	5,1	<b>57,75</b>	
SG 0,5-0,06 F		60	35	440	390	410	50	320	300	5,3	<b>64,00</b>	
SG 0,5-0,06 "Arctic"		60	35	440	390	410	50	320	300	5,3	<b>57,75</b>	
SG 0,5-0,06 "Arctic" F		60	35	440	390	410	50	320	300	5,8	<b>64,00</b>	
SG 0,5-0,07		70	40	550	400	395	50	305	285	7,3	<b>84,50</b>	
SG 0,5-0,09		90	50	550	500	395	50	305	285	10,5	<b>105,00</b>	
SG 1-0,1		1,0 / 0.28	100	60	550	500	450	50	355	335	12,0	<b>123,75</b>
SG 1-0,15			150	80	720	520	450	50	355	335	18,5	<b>153,65</b>
SG 1,5-0,21	1,5 / 0.42	210	100	820	620	450	50	355	335	22,0	<b>201,10</b>	
SG 1,5-0,26		260	140	820	620	550	50	455	435	24,5	<b>218,60</b>	
Set filter bags NFP-1 (4 pieces)										0,03	<b>3,00</b>	
Extra latch for the lid (for 1 piece)											<b>3,00</b>	
Stands PSG for grease traps: SG 0.5-0.04 "Optima", SG 0.5-0.045, SG 0.5-0.06 "Optima-60", SG 0.5-0.06, SG 0, 5-0.06 "Arctic"												
Stand for grease trap (PSG-1): Length: 500mm, Width: 440mm, Height: 100mm											<b>12,00</b>	
Stand for grease trap (PSG-1): Length: 500mm, Width: 440mm, Height: 150mm											<b>15,00</b>	
<b>GREASE SHOPS</b>												
SG 2-0,32	2/ 0.5	320	180	820	620	620	110	550	500	30,0	<b>280,00</b>	
SG 2-0,35		350	200	920	620	670	110	575	525	35,0	<b>338,25</b>	
SG 3-0,47	3/ 0.8	450	240	920	720	720	110	625	575	40,0	<b>376,40</b>	
SG 3-0,62		600	300	970	820	770	110	675	625	49,0	<b>455,00</b>	

Models with the letter "F" are equipped with brackets for filter bags.

The set of such models - 5pcs filter bags (1 pre-installed + 4pcs replacement)

A filter package designed for use for up to 2 weeks, depending on the amount of fatty waste.

Using packet filter in the models with the letter "F" does not preclude the application of the grease trap in the normal mode, when the fat and the pellet just draw it mechanically.

**On grease registration certificate is issued to the instruction and the sanitary and hygienic conclusion. Manufacturer's warranty - 2 years**

Price is for export, without taxes and discounts, from a warehouse in Kiev.

Price list is valid from 01.02.2018